


DIMENSIONS (mm)




Pins: Ø0.5 mm
 L = 3.4 ± 0.3 mm
 Material: Cu-alloy tinned

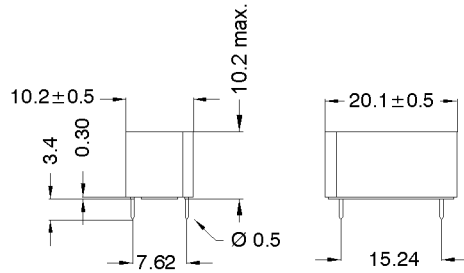

tolerances according to DIN ISO 2768 m

LAYOUT (15D)

pitch 2.54 mm/Top view



MARKING



MEDER-Label
 Type
 Production code,
 EN60062/Factory code

| Coil Data at 20 °C | Conditions | Min | Typ | Max | Unit |
|--------------------|------------|-------|-------|-------|------|
| Coil resistance | | 1.620 | 1.800 | 1.980 | Ohm |
| Coil voltage | | | 12 | | VDC |
| Rated power | | | 80 | | mW |
| Pull-In voltage | | | | 8,4 | VDC |
| Drop-Out voltage | | 1,8 | | | VDC |

| Contact data 66 | Conditions | Min | Typ | Max | Unit |
|-----------------------------|---|---------|-----|------|------|
| Contact-form | | A | | | |
| Contact-material | | Iridium | | | |
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 10 | W |
| Switching voltage | DC or Peak AC | | | 200 | V |
| Switching current | DC or Peak AC | | | 0,5 | A |
| Carry current | DC or Peak AC | | | 1 | A |
| Contact resistance static | Measured with 40% overdrive Start Value | | | 100 | mOhm |
| Insulation resistance | RH <45 %, 100 V test voltage | 1 | | | GOhm |
| Breakdown voltage (< 20 AT) | according to IEC 255-5 | 250 | | | VDC |
| Insulation resistance | measured with 40% overdrive | | | 0,7 | ms |
| Release time | measured with no coil excitation | | | 0,05 | ms |
| Capacity | @ 10 kHz across open switch | | 0,3 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|------------------------------------|-------------------------------|----------------------------|-----|-----|-------|
| Insulation resistance Coil/Contact | RH <45%, 200 VDC test voltage | 10 | | | GOhm |
| Dielectric Strength Coil/Contact | according to IEC 255-5 | 4,25 | | | kV DC |
| Housing material | | PBT glass fibre reinforced | | | |
| Sealing compound | | Polyurethan | | | |
| Connection pins | | Copper alloy tin plated | | | |

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|-----------------------------|-----|-----|-----|------|
| Shock | 1/2 sine wave duration 11ms | | | 50 | g |
| Vibration | from 10 - 2000 Hz | | | 20 | g |
| Operating temperature | | -20 | | 70 | °C |
| Storage temperature | | -25 | | 85 | °C |



Products for tomorrow...

Europe: +49 / 7731 8399 0 | Email: info@meder.com
USA: +1 / 508 295 0771 | Email: salesusa@meder.com
Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.:
1312166115
Item:
DIL12-1A66-15D

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|----------------------------|--------------|-----|-----|------|
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |
| Washability | | fully sealed | | | |

Modifications in the sense of technical progress are reserved

Designed at: 22.01.09 Designed by: MPOTUZAK
Last Change at: Last Change by:

Approval at: 22.01.09 Approval by: DSTASTNY
Approval at: Approval by:

Version: 01