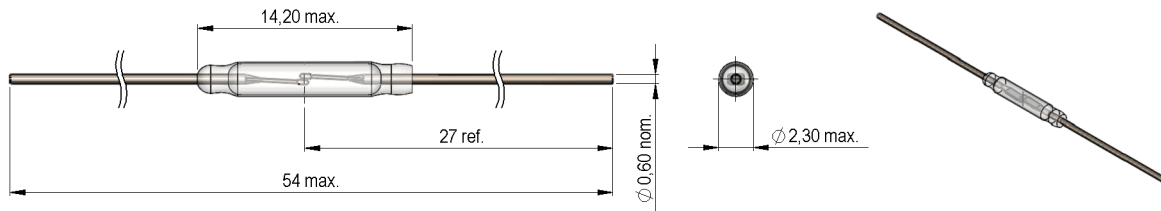

**Dimensions mm[inch]**  
 tolerances acc. to DIN ISO 2768-m  
 Toleranzen gem. DIN ISO 2768-m

**Isometric**

Scale 1:1  
Maßstab 1:1



Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull-In excitation (Reference value)	Reed switch unmodified measured in coil- "define operation"	20		25	AT
Test-Coil	Reed switch unmodified	KMS-01			

Contact data 05/3	Conditions	Min	Typ	Max	Unit
Contact - No.		05/3			
Contact-form		A			
Contact-material		Rhodium			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			250	V
Switching current	DC or Peak AC			1	A
Carry current	DC or Peak AC			1.5	A
Contact resistance static	Start value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			GOhm
Breakdown voltage	according to EN 60255-5	600			VDC
Operate time incl. bounce				0.6	ms
Release time	measured with no coil excitation			0.1	ms
Capacity	@ 10 kHz across open switch		0.2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Reach / RoHS conformity		yes			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine, duration 11ms, in 3 axis			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-40		125	°C
Storage temperature		-50		155	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C