Europe: +49 / 7733 9487 0 | Email: info@meder.com
USA: +1 / 508 539 0002 | Email: salesusa@meder.com
Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.: 2116601515
Item: KSK-1A66-1515

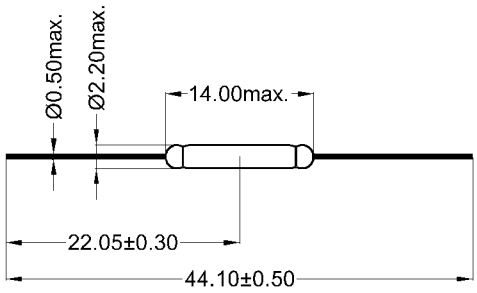



Magnetical properties	Conditions	Min	Setpoint	Max	Unit
Pull-In excitation (Reference value)	Reed switch unmodified measured in coil- "define operation"	15		15	AT
Test-Coil	Reed switch unmodified	KMS-01			

Contact data 66	Conditions	Min	Setpoint	Max	Unit
Contact-No.		66			
Contact-form		A			
Contact-material		Rhodium			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage (<21 AT)	Any DC combination of V & A not to exceed their individual max.'s			180	V
Switching current	DC or Peak AC			0,5	A
Carry current	DC or Peak AC			1,25	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			GOhm
Breakdown voltage (<21 AT)	according to IEC 255-5	200			VDC
Operate time incl. bounce	measured with 40% overdrive			0,5	ms
Release time	measured with no coil excitation			0,1	ms
Capacity	@ 10 kHz		0,2		pF

Contact dimensions	Conditions	Min	Setpoint	Max	Unit
Contact strands	R= round and P= flat Connecting leads	r			
Overall length	Tolerance according to drawing		44,3		mm
Glass body length	Tolerance according to drawing		14		mm

Environmental data	Conditions	Min	Setpoint	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		130	°C
Storage temperature		-55		130	°C
Soldering temperature	max. 5 sec			260	°C

Verarbeitungshinweise im Datenbuch oder bei www.meder.com beachten