


Abmessungen / dimensions :

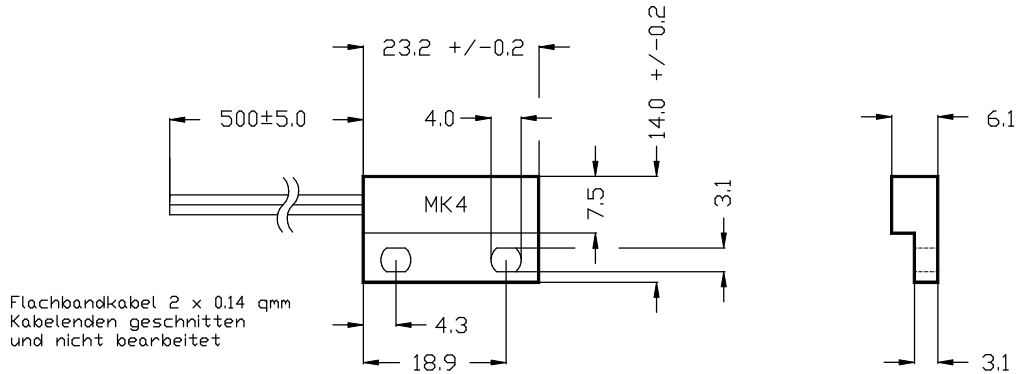

Toleranz / tolerance : ± 0.1 mm

Kontakt Daten / contact data 71

Schaltleistung / switched power	max.	(W)	10
Schaltspannung / switched voltage	max.	(VDC)	200
Schaltstrom / switched current	max.	(A)	0.5
Transportstrom / carry current	max.	(A)	1.0
Kontaktwiderstand / contact resistance	max.	(mΩ)	150
Durchbruchspannung / breakdown voltage	min.	(VDC)	250

Kontakt (unbearbeitet) / contact (unsheared, unbended)

Anzugserregung / pull-in energization	(AW)	16 - 25
Abfallerregung / drop-out energization	(AW)	-

Kontakt (bearbeitet) / contact (sheared, bended)

Anzugserregung / pull-in energization	(AW)	-
Abfallerregung / drop-out energization	(AW)	-

Kunde / customer :	Standard Produkt/standard product
Sachnummer / part - number :	2243711055

Bemerkung / remark :	Kontakte ausgemessen mit Mess Spule KMS-01
----------------------	--