



 **Dimensions mm[inch]**  
tolerances acc. to DIN ISO 2768-m  
Toleranzen gem. DIN ISO 2768-m

**Isometric**  
Scale 2:1  
Maßstab 2:1

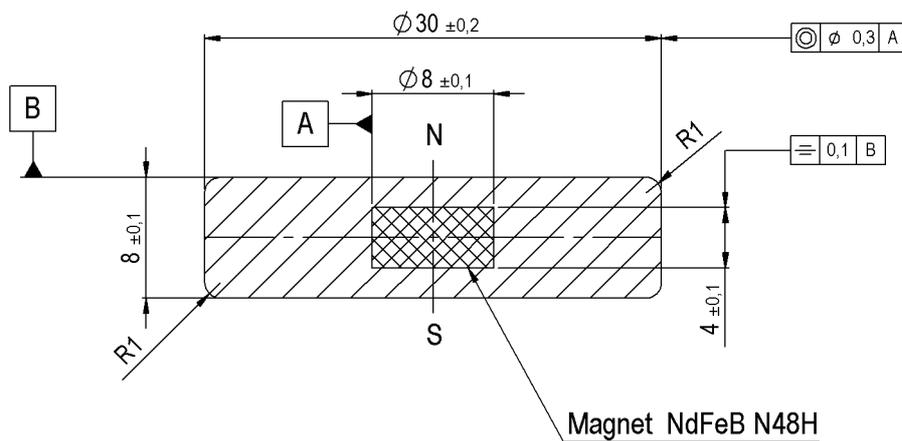

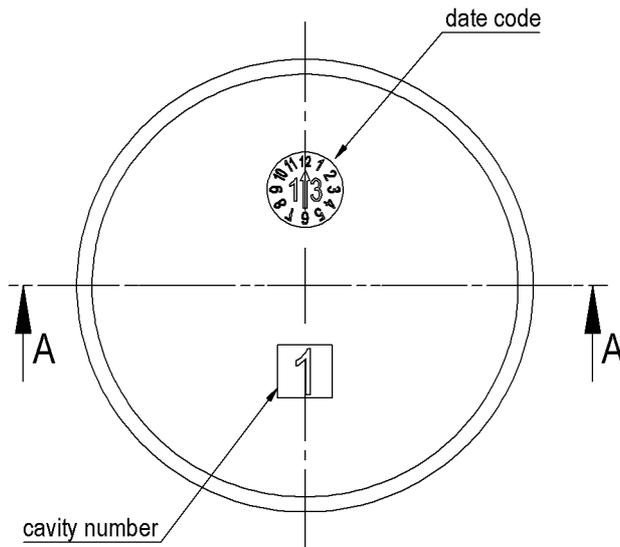

Europe: +49 / 7731 8399 0

| Email: info@standexmeder.com

Item No.:

USA: +1 / 508 295 0771

| Email: salesusa@standexmeder.com

**2560015335**

Asia: +852 / 2955 1682

| Email: salesasia@standexmeder.com

Item:

**MS-BV15335**

Special Product Data	Conditions	Min	Typ	Max	Unit
Material of float		PP HF700SA, colour blue			
Float weight					g

Environmental data	Conditions	Min	Typ	Max	Unit
Safety class	DIN EN 60529		IP68		

Mag. value. DIN IEC 60404-8-	Conditions	Min	Typ	Max	Unit
Energy product (B x H) max.			448		kJ/cu m
Remanence Br			1.370		mT
Coercivity HcB			859		kA/m
Coercivity HcJ		1.353			kA/m
Max. operating temperature				122	°C
Magnetic moment	inclusive of 5% tolerance measured with MS150				E-6 Vs*cm
Direction of Magnetization		axial			
Magnet Material		NdFeB, N48H, nickel plated			

General data	Conditions	Min	Typ	Max	Unit
Remarks		All details according to manufacturers information			

Modifications in the sense of technical progress are reserved

Designed at: 11.09.13 Designed by: WKOVACS

Approval at: 11.09.13 Approval by: DKUECHLER

Last Change at: Last Change by:

Approval at: Approval by:

Rev. No.: 01