

REED SWITCH

ORD229

High Breakdown Voltage, High Power (AC 200 V Switching)


GENERAL DESCRIPTION

The ORD229 is a single-contact reed switch designed for high breakdown voltage of 600 VDC and high power of AC 70 VA and DC 50 W. The contacts are sealed within the glass tube with inert gas to maintain contact reliability.

Features

- (1) Reed contacts are hermetically sealed within a glass tube with inert gas and do not receive any influence from the external atmospheric environment.
- (2) Quick response
- (3) The structure comprises an operating system and electrical circuits coaxially. Reed switches are suited to applications in radio frequency.
- (4) Reed switches are compact and light weight.
- (5) Superior corrosion resistance and wear resistance of the contacts assures stable switching operation and long life.
- (6) With a permanent magnet installed, reed switches economically and easily become proximity switches.

External Dimensions (Unit:mm)

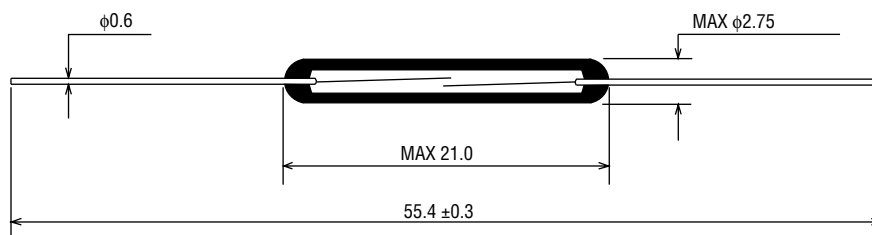


APPLICATIONS OF REED SWITCHES

1. Automotive electronic devices
2. Control equipment
3. Communication equipment
4. Measurement equipment
5. Household appliances


ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Rated Value			Unit
			Min.	Typ.	Max.	
Pull-in Value	PI	—	20	—	60	AT
Drop-out Value	DO	—	6	—	—	AT
Contact Resistance	CR	—	—	—	100	mΩ
Breakdown Voltage	—	PI>35	600	—	—	VDC
Breakdown Voltage	—	PI 20 to 35	500	—	—	VDC
Insulation Resistance	—	—	10 ¹⁰	—	—	Ω
Electrostatic Capacitance	—	—	—	—	0.5	pF
Contact Rating	—	—	—	—	50	W
Contact Rating	—	—	—	—	70	VA
Maximum Switching Voltage	—	—	—	—	300 AC	V
Maximum Switching Voltage	—	—	—	—	350 DC	V
Maximum Switching Current	—	—	—	—	DC0.7/AC0.5	A
Maximum Carry Current	—	—	—	—	2.5	A


(1) Drop-out vs. Pull-in

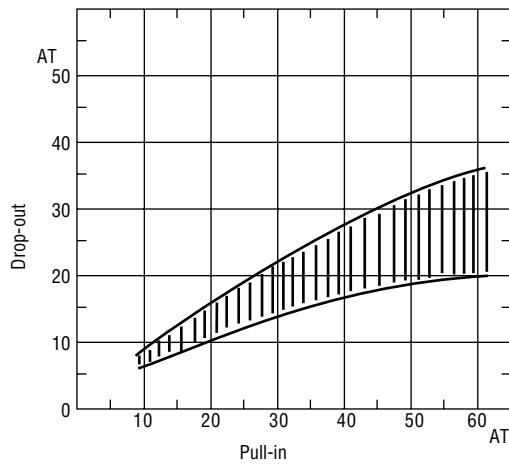


(2) Contact resistance

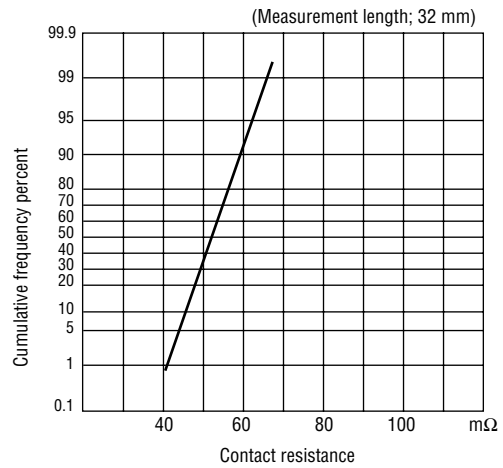


(3) Breakdown voltage

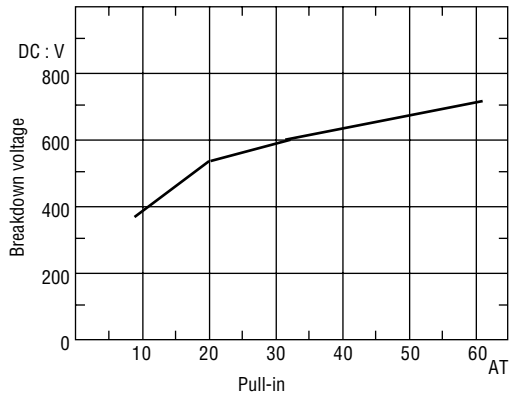

(4) Insulation resistance

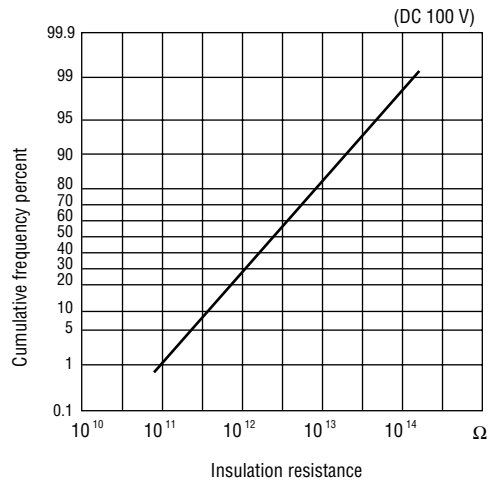


(5) Electrostatic capacitance

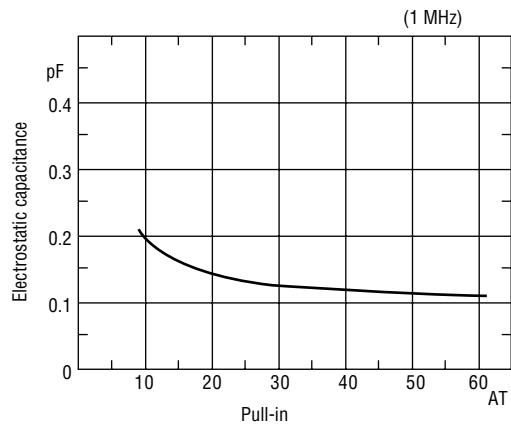


OPERATING CHARACTERISTICS

Parameter	Rated Value			Unit
	Min.	Typ.	Max.	
Operate Time	—	—	0.6	ms
Bounce Time	—	—	0.5	ms
Release Time	—	—	0.05	ms
Resonant Frequency	2250	2500	2750	Hz
Maximum Operating Frequency	—	—	500	Hz


(1) Operate time

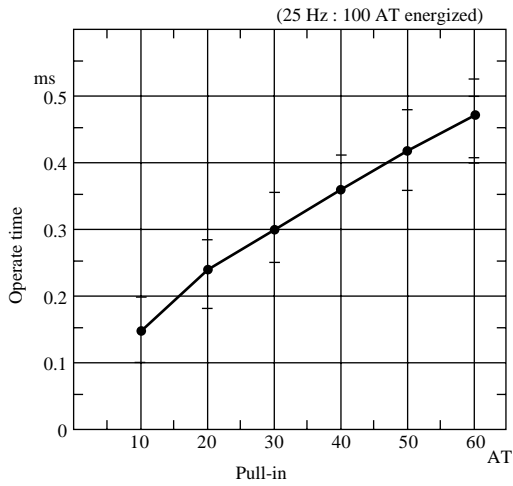


(2) Bounce time

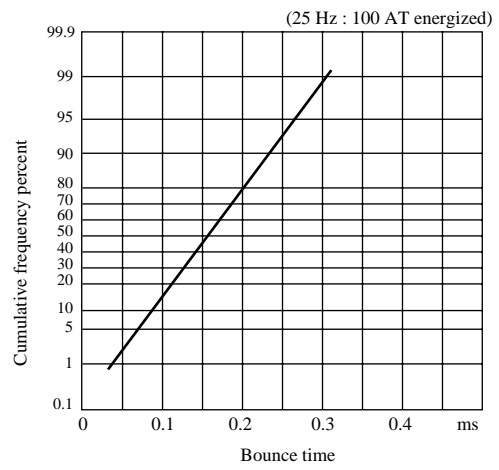

(3) Release time

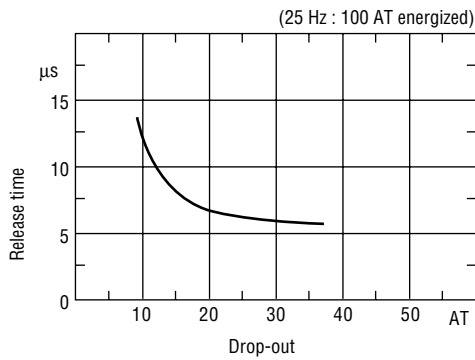


(4) Resonant frequency

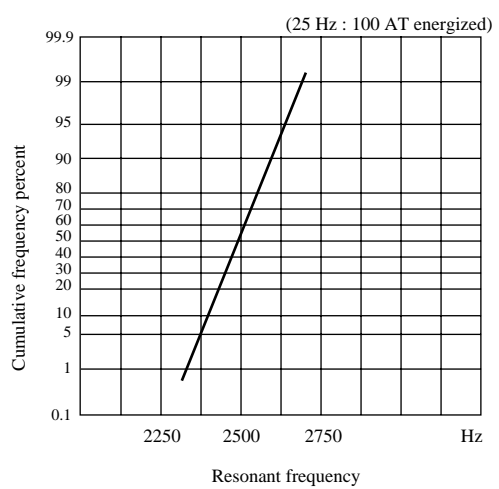


MECHANICAL CHARACTERISTICS

(1) Lead tensile test (static load)

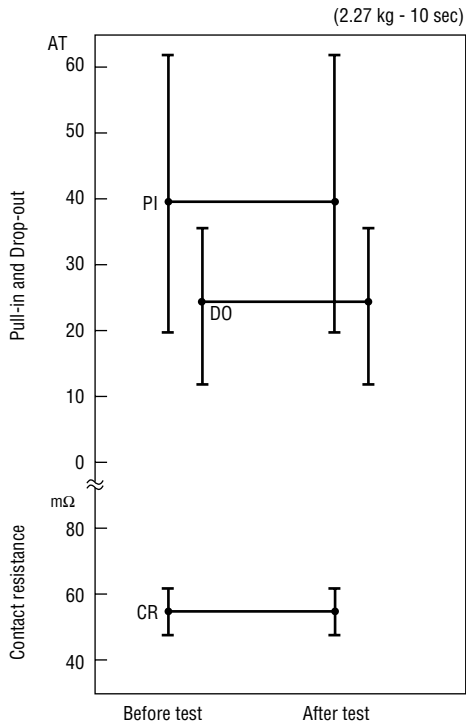


(2) Lead tensile strength

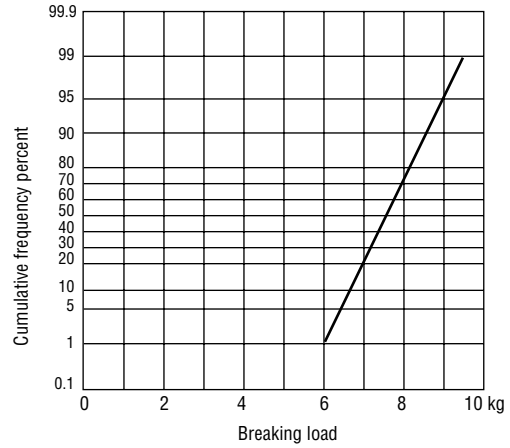


ENVIRONMENTAL CHARACTERISTICS


(1) Temperature characteristics

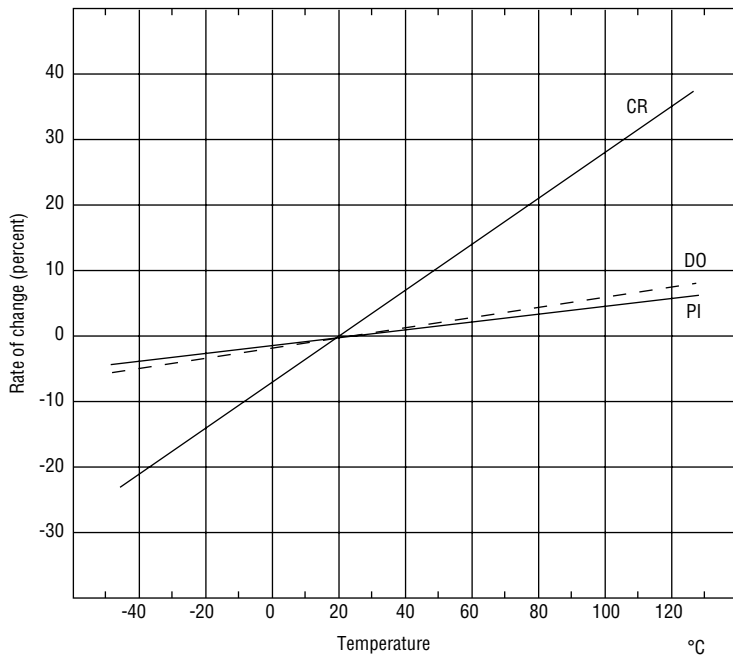


(2) Temperature cycle

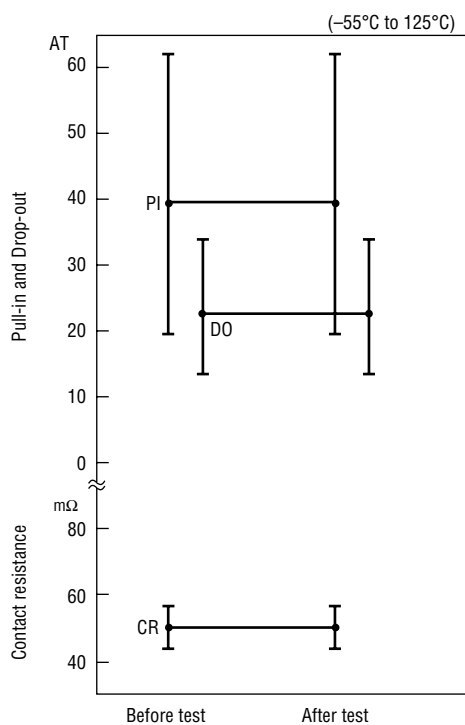


(3) Temperature and humidity cycle

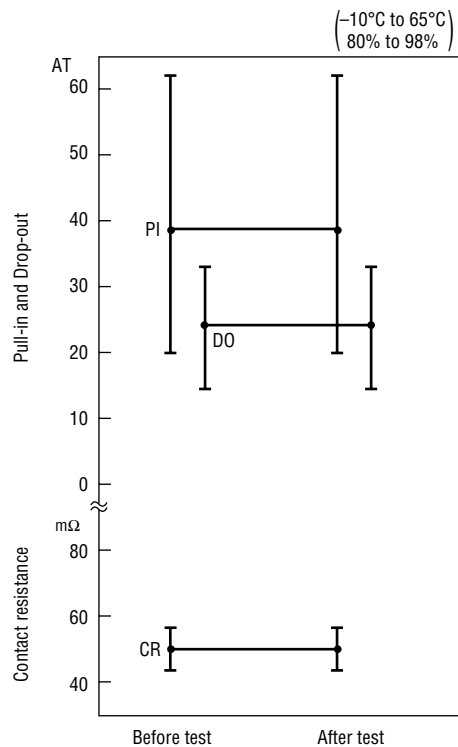



(4) High temperature storage test

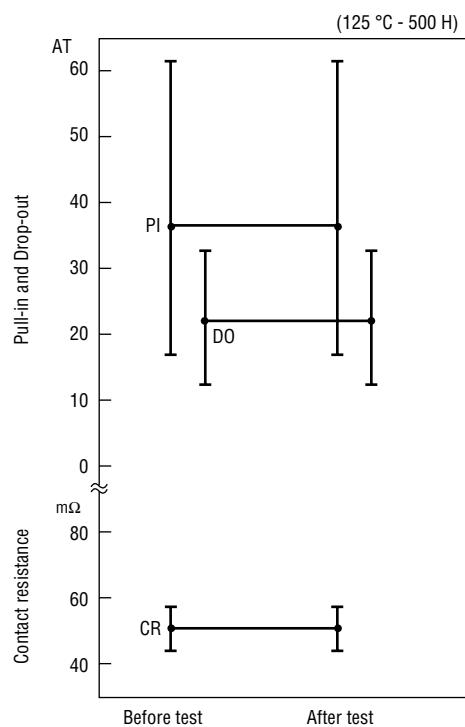


(5) Low temperature storage test

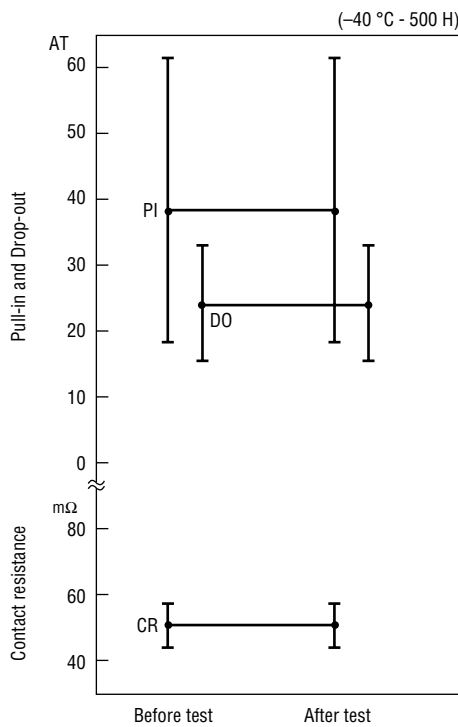

(6) Shock test

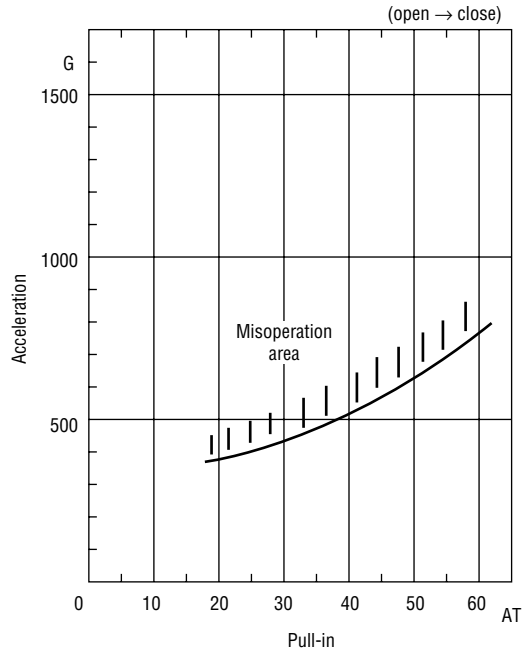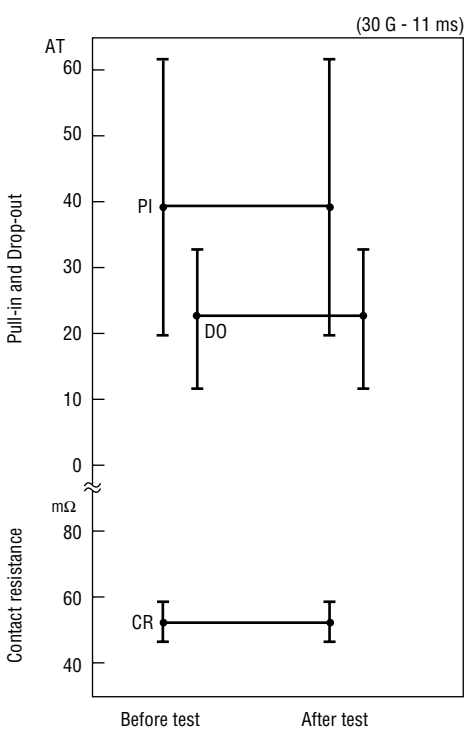


(7) Vibration test

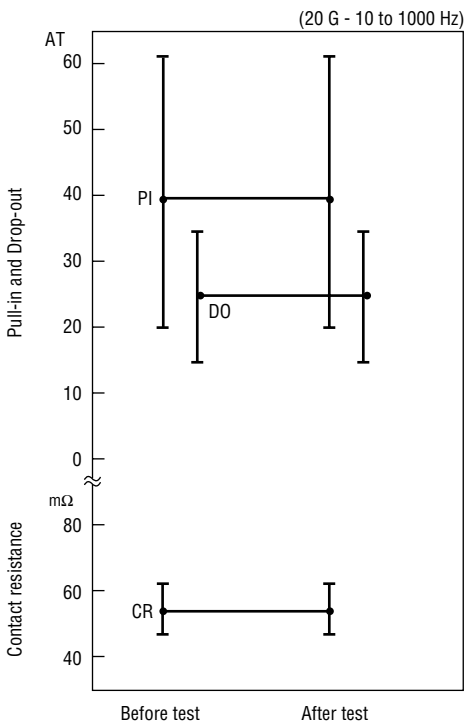

LIFE EXPECTANCY DATA: ORD229


Load conditions

Voltage : 200 VAC
 Current : 200 mA, 250 mA
 Load : Resistive load

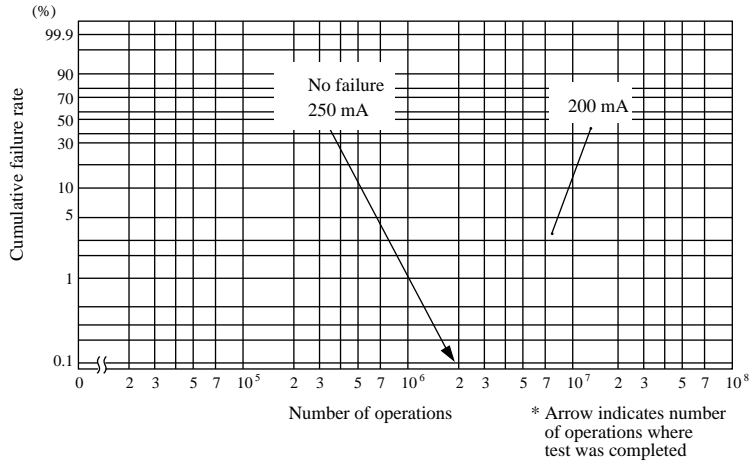

Load conditions

Voltage : 350 VDC, 270 VDC
 Current : 1 mA, 270 μ A
 Load : Resistive load

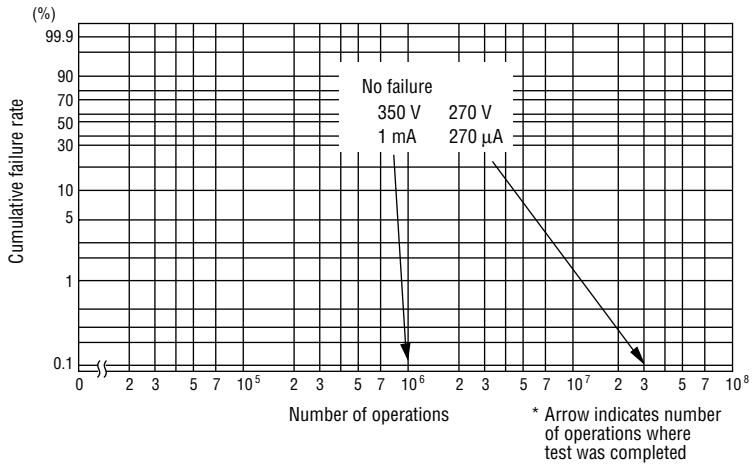

Load conditions

Voltage : 100 VDC, 50 VDC
 Current : 0.5 A, 1.0 A, 0.5 A
 Load : Resistive load

