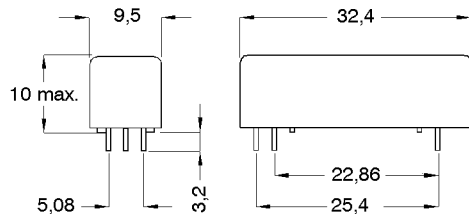
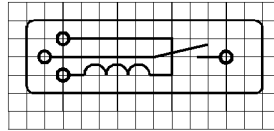


**DIMENSIONS (mm)**

 Pins:  $\varnothing 0.65$  mm  
 L =  $3.2 \pm 0.3$  mm  
 Material: Cu-alloy tinned

**LAYOUT**

pitch 2.54 mm/Top view


**MARKING**

 MEDER-Label  
 Type/Layout  
 Production code,  
 EN60062/Factory code

Coil datas at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		2.070	2.300	2.530	Ohm
Coil voltage			24		VDC
Rated power			250		mW
Pull-In voltage				16,8	VDC
Drop-Out voltage		2			VDC

Contact data 85	Conditions	Min	Typ	Max	Unit
Contact-form			A		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			100	W
Switching voltage	DC or Peak AC			1.000	V
Switching current	DC or Peak AC			1	A
Carry current	DC or Peak AC			2,5	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			GOhm
Breakdown voltage (30-40 AT)	according to IEC 255-5	2.500			VDC
Operate time incl. bounce	measured with 40% overdrive			1,1	ms
Release time	measured with no coil excitation			0,1	ms
Capacity	@ 10 kHz		0,5		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Insulation resistance Coil/Contact	RH <45%, 100 V test voltage	10			GOhm
Insulation voltage Coil/Contact	according to IEC 255-5	2			kV DC
Housing material		Metal			
Sealing compound		Polyurethan			
Connection pins		Cu-alloyed tinned			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			30	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-35		105	°C
Soldering temperature	max. 5 sec			260	°C
Washability					