
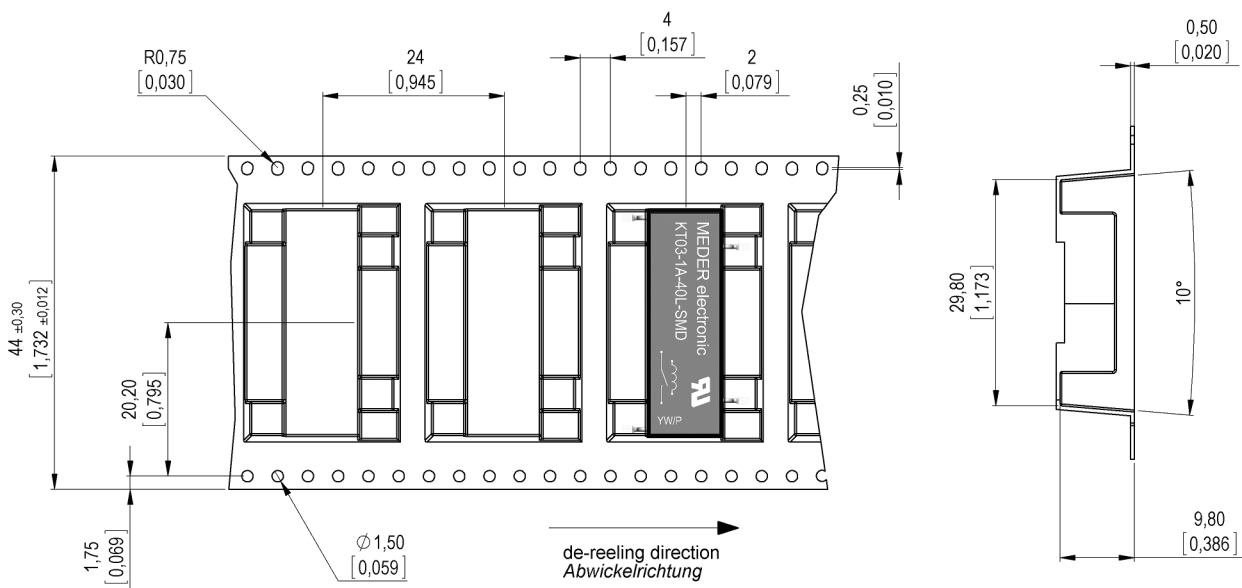


reflow soldering conditions according to JEDEC norm J-STD 020D.1

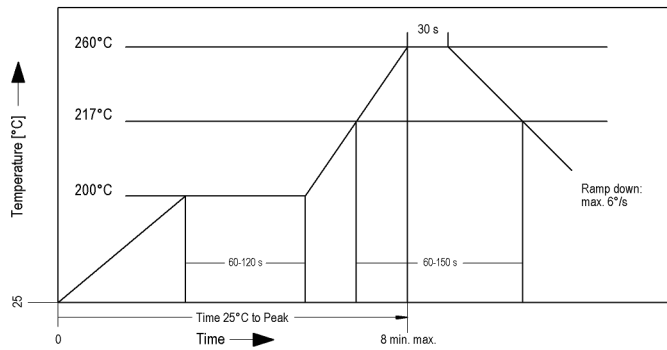

Modifications in the sense of technical progress are reserved

Designed at: 22.06.15 Designed by: THAUKE  
 Last Change at: 06.10.15 Last Change by: AAI

Approval at: 26.06.15 Approval by: JHEYDER  
 Approval at: 07.10.15 Approval by: DRUDOLF

Rev. No.: 2



Europe: +49 / 7731 8399 0

| Email: info@standexmeder.com

Item No.:

USA: +1 / 508 295 0771

| Email: salesusa@standexmeder.com

**9003185401**

Asia: +852 / 2955 1682

| Email: salesasia@standexmeder.com

Item:

**KT03-1A-40L-SMD**

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		58	65	72	Ohm
Coil voltage			3		VDC
Rated power			138		mW
Inductance			21		mH
Pull-In voltage				2,5	VDC
Drop-Out voltage		0,6			VDC

Contact Data 85	Conditions	Min	Typ	Max	Unit
Contact-No.			OKI ORD2210V		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			100	W
Switching voltage	DC or Peak AC			1.000	V
Switching current	DC or Peak AC			1	A
Carry current	DC or Peak AC 100% Duty Cycle			2,5	A
Contact resistance static	Measured with 40% overdrive			150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation			200	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			GOhm
Breakdown voltage (40-50 AT)	according to EN 60255-5	3			kV DC
Capacitance	@ 10 kHz across open switch		0,5		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Dielectric Strength Coil/Contact	according to EN 60255-5	7			kV DC
Insulation resistance Coil/Contact	RH <45%, 200 VDC Measuring Voltage	1			TOhm
Capacity Coil/Contact	@ 10 kHz		1,2		pF
Housing material			mineral filled epoxy		
Approval			UL-File Nr. NRNT2.E156887		
Reach II / RoHS conformity			yes		

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine, duration 11ms, in 3 axis			30	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-40		100	°C
Storage temperature		-40		125	°C
Soldering Temperature Tsold	Reflow acc.IPC/JEDEC J-STD-020D.1			260	°C
Washability			fully sealed		

General data	Conditions	Min	Typ	Max	Unit
Packaging			T&R per 250 pcs.		

Modifications in the sense of technical progress are reserved

Designed at: 22.06.15 Designed by: THAUKE

Approval at: 26.06.15 Approval by: JHEYDER

Last Change at: 06.10.15 Last Change by: AAI

Approval at: 07.10.15 Approval by: DRUDOLF

Rev. No.: 2