



*Products for tomorrow...*

**DIMENSIONS (mm)**

**LAYOUT(210)**

**MARKING**

pitch 2.54 mm/Top view

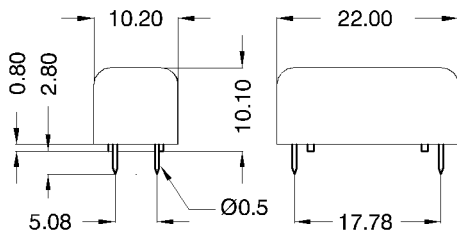

Pins: Ø0.5 mm  
 L = 2.8±0.3 mm  
 Material: Cu-alloy tinned

MEDER-Label  
 Type  
 Production code,  
 EN60062/Factory code



Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		9.900	11.000	12.100	Ohm
Coil voltage			12		VDC
Rated power			13		mW
Pull-In voltage				8,4	VDC
Drop-Out voltage		1,8			VDC

Contact data 66	Conditions	Min	Typ	Max	Unit
Contact-form		A			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage (>20 AT)	DC or Peak AC			200	V
Switching current	DC or Peak AC			0,5	A
Carry current	DC or Peak AC			1,25	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation Start Value			200	mOhm
Insulation resistance	RH <45 %, 100 VDC test voltage	10			GOhm
Breakdown voltage (>20 AT)	according to IEC 255-5	225			VDC
Operate time incl. bounce	measured with 40% overdrive			0,5	ms
Release time	measured with no coil excitation			0,1	ms
Capacity			0,2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Insulation resistance Coil/Contact	RH <45%, 200 VDC Messspannung	10			GOhm
Insulation voltage Coil/Contact	gemäß IEC 255-5	2,12			kV DC
Housing material		Metal			
Sealing compound		Type PU E8702 FW-Z/W			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-25		85	°C
Soldering temperature	Wellenlöten max. 5 sec			260	°C
Cleaning		fully sealed			

Modifications in the sense of technical progress are reserved

Designed at: 04.09.06 Designed by: WKOVACS  
 Last Change at: 04.09.06 Last Change by: WKOVACS

Approval at:  
 Approval at:

Approval by:  
 Approval by: RUDI RIPPL

Version: 02